




TETA. Industrial Femtosecond Laser System

- One of the smallest laser heads in its class
- More than 1.5 mJ/pulse at 1030 nm
- <260 fs typical pulse duration
- >20 W average power at 1030 nm
- High beam quality with typical $M^2 < 1.1$
- 1030 / 515 / 343 / 248 nm possible outputs
- Monolithic thermally stabilized body
- Industrial and scientific application
- Excellent beam pointing and long term power stability
- Stand-alone operation and PC remote control software

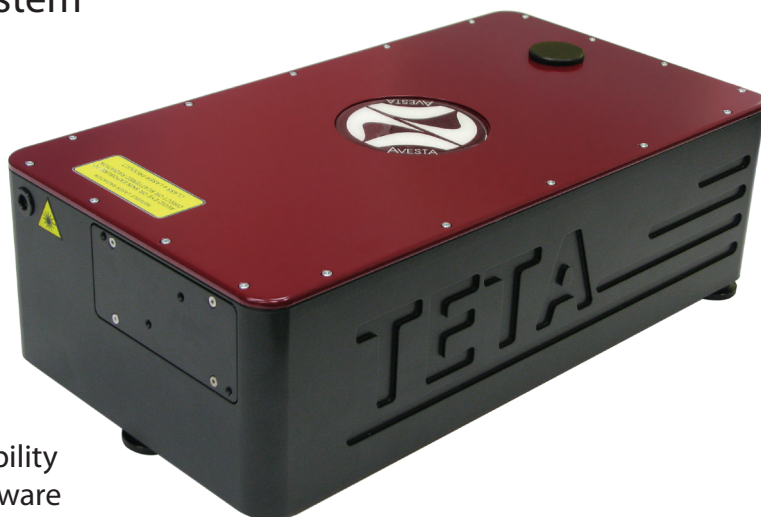

TETA-10 laser head

Product overview



TETA system with integrated SH and FH units

The TETA is an Yb solid-state laser system. The system comprises a built-in fiber seed oscillator, fiber pulse stretcher, Faraday isolator, CPA-based regenerative amplifier with direct diode pumping, additional pulse picker and pulse compressor. All components are integrated into a single thermostabilized box ensuring stability and true turn-key operation. The additional built-in Pockels cell offers instant output radiation shuttering as well as total user control of output repetition rate. Moreover, the cell features precise pulse picking with control over the number of fired pulses (burst mode) and temporal period of radiation.

The TETA system may be equipped with a SH, TH and FH generation units, as well as with the Compulse capillary compressor which allows to bring the pulse duration down to 30 fs with >50% energy conversion efficiency.

Applications:

- Time-Resolved Ultrafast Studies
 - Pump-Probe Spectroscopy
- Conversion of Laser Radiation
 - Ultrafast OPA Pumping
 - Second Harmonic Generation (SHG)
 - Third Harmonic Generation (THG)
 - Fourth Harmonic Generation (FHG)
 - THz generation
- Material and Biological Tissue Processing
 - Ultrafast Micromachining
 - Femtosecond Ablation
 - Cold Ablation Techniques
 - Photomask Repair Solutions
- Laser Systems Design, Integration and Amplification
 - OPG Pumping
 - Front-End for TW- and PW-Class Femtosecond Amplifiers
 - OEM Integration
- High-Energy Research
 - Free-Electron Laser (FEL) Seeding and Diagnostics



TETA-10 control 19" rack unit with on-board closed-loop chiller unit



AVESTA

LASERS AND OPTICAL SYSTEMS

fs@avesta.ru
www.avesta.ru

Avesta Ltd., 11 Fizicheskaya Street
Troitsk, 108840, Moscow, Russia
Tel.: +7 (495) 967-94-73
Fax: +7 (495) 646-04-95

China: Eachwave scientific instrument Co., Ltd
Tel: +86-21-62209657, +86-21-54843093
Email: sales@eachwave.com
Web: www.eachwave.com

	TETA-6	TETA-10	TETA-20
Max. average output power	6 W	10 W	20 W
Maximum pulse energy	>400 μ J		>1 mJ
Min. pulse duration ¹⁾	<270 fs		<350 fs
Pulse duration tuning range ¹⁾	<270 fs - 10 ps		<350 fs - 10 ps
Central wavelength ²⁾ (fixed)	1033 \pm 3 nm		1030 \pm 3 nm
M ²	<1.15		<1.25
Beam diameter (at 1/e ²)	3 \pm 0.3 mm		5 \pm 0.5 mm
Pulse repetition rate (user-adjustable)	single-shot...200 kHz (up to 1 MHz upon request)		
Pre- and post-pulse contrast	>5000:1		
Long-term output stability ³⁾	<0.5% rms over 48 h		
Output polarization	linear, vertical		
Spatial mode	TEM00		
Beam ellipticity ⁴⁾	<10%		
Beam astigmatism ⁴⁾	<10%		
Beam divergence (full angle)	<0.6 mrad		
Beam pointing stability	<25 μ rad/°C		
Cold start warm-up time (beam position, output power)	<40 min		

Environmental and utility specifications

Operating temperature	15-30 °C		
Relative humidity	<60%, non-condensing		
Voltage	single-phase; 100-240 VAC; 50/60 Hz		
Power consumption	<1.5 kW		<2 kW

Physical dimensions


Laser head (LxWxH)	460x250x147 mm	500x330x147 mm
Control and power supply 19" rack (WxLxH)	553x600x663 mm	
Umbilical length	3 m	

1) - measured with Avesta's AA-10DD-12PS interferometric autocorrelator using Gaussian fitting; motorized tunable pulse duration with PC control up to 10 ps is also installed by default; the Compulse-1030 external hollow-fiber pulse compressor with output pulse duration down to 30 fs is also available as an option;


2) - external second, third and fourth harmonic generators are available upon request; certain built-in combinations are also available; Raman shifters to 1530 nm and 1890 nm are also available;

3) - measured under stable environmental conditions;


4) - measured at maximum average power and 100 kHz output repetition rate.

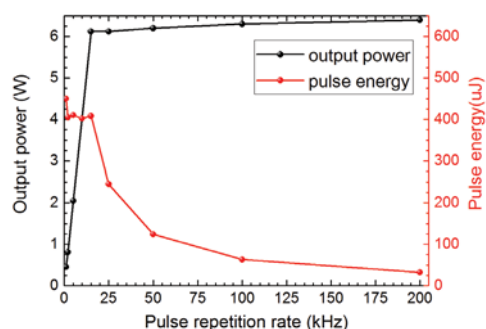

TETA-6

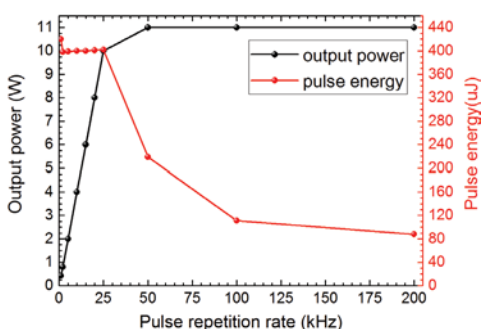


TETA-10

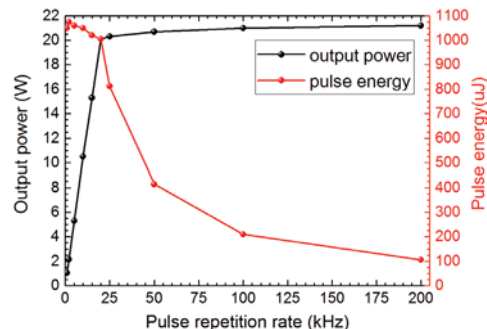


TETA-20

TETA output power and pulse energy vs. output repetition rate


Typical system test data

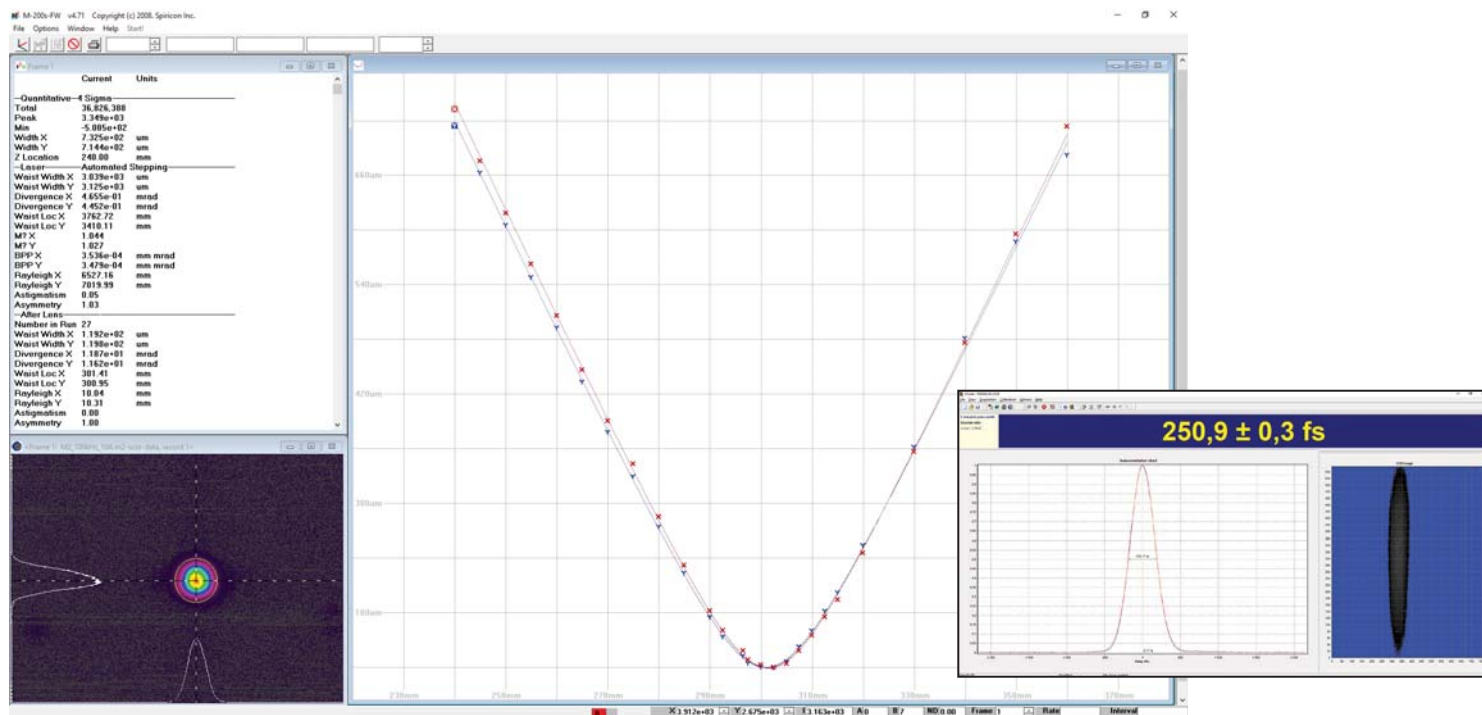


TETA typical M² data and typical AC trace

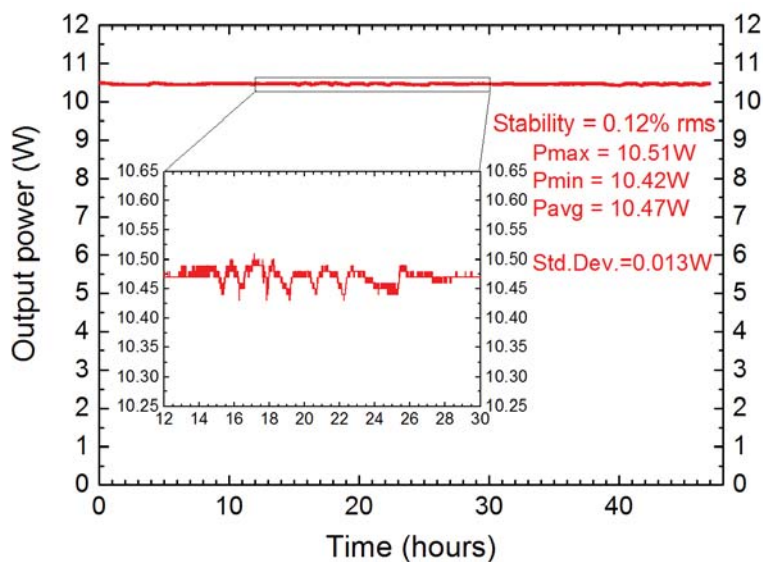


TETA-10 long-term power stability 48-hour run (0.12% rms)

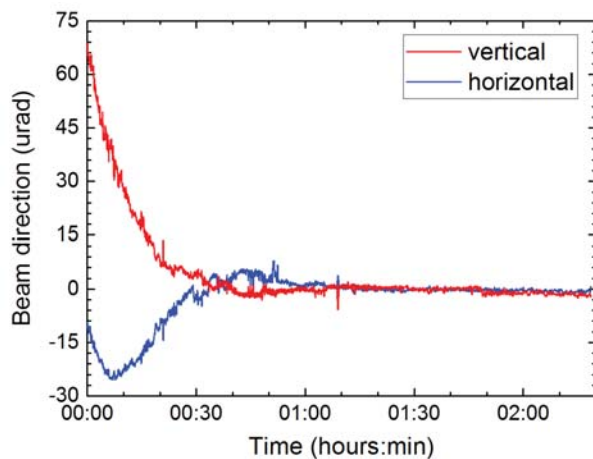


TETA beam direction after cold start

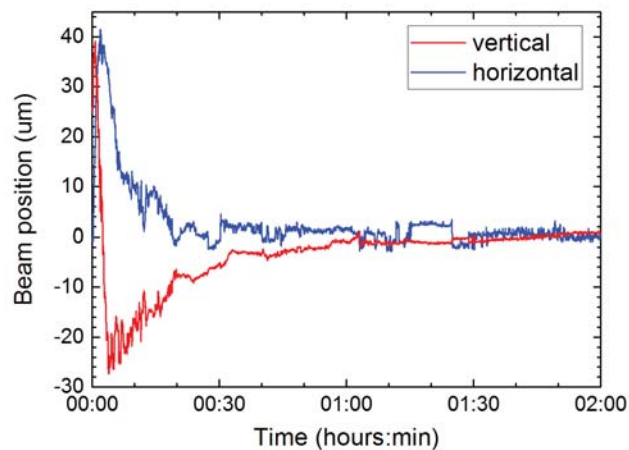

TETA beam position after cold start

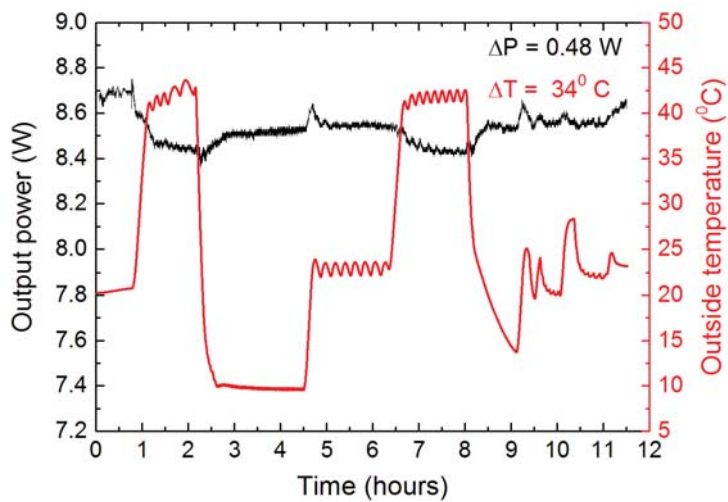


TETA-10 thermal cycling with large delta T beyond operating temperature limits

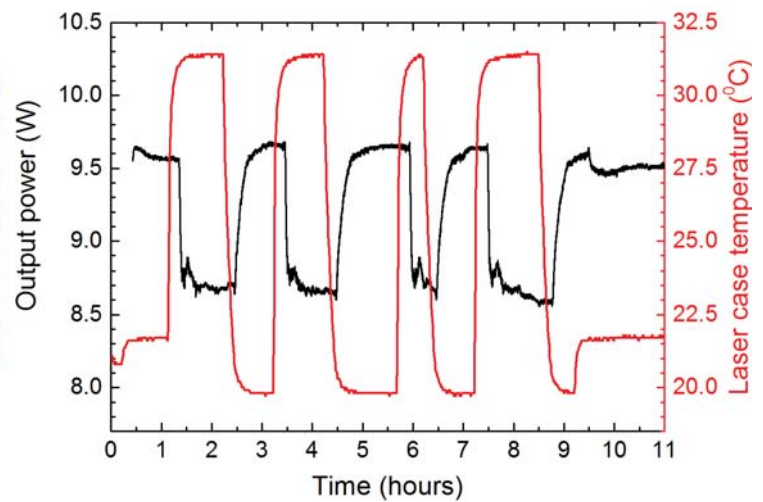


TETA-10 thermal stressing with chiller stabilization turned OFF. The test is used to show the rigidity of the TETA mechanical design and repeatability of output parameters after transportation or long off-duty periods



System controls

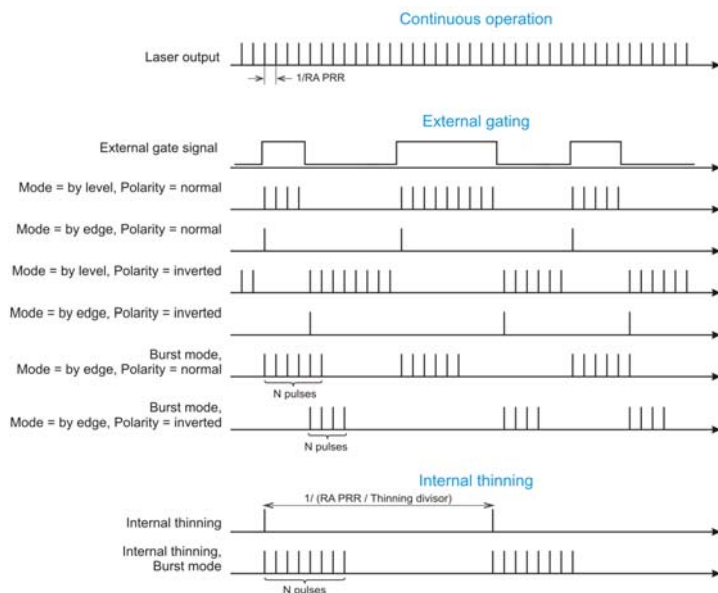


TETA output control modes overview

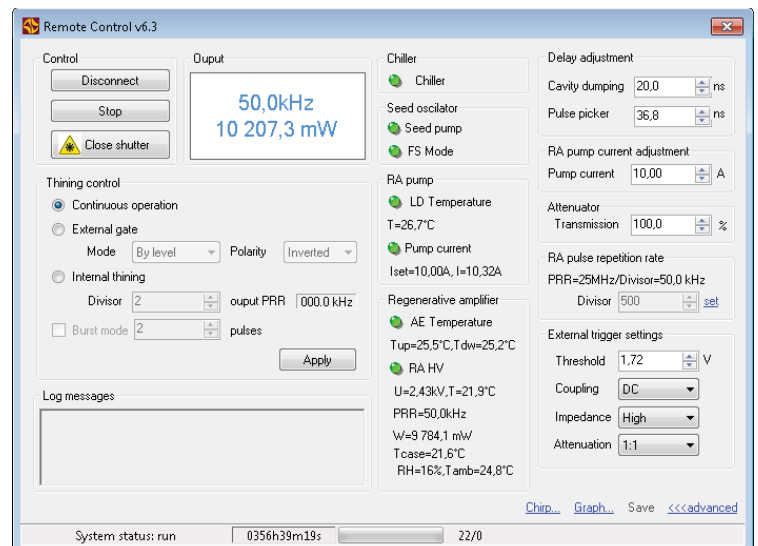

TETA remote control PC software

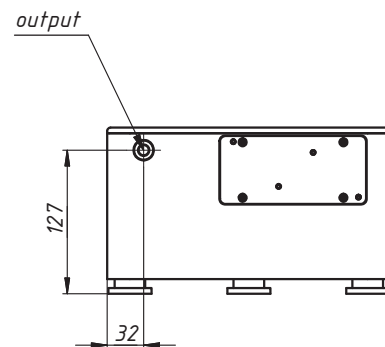
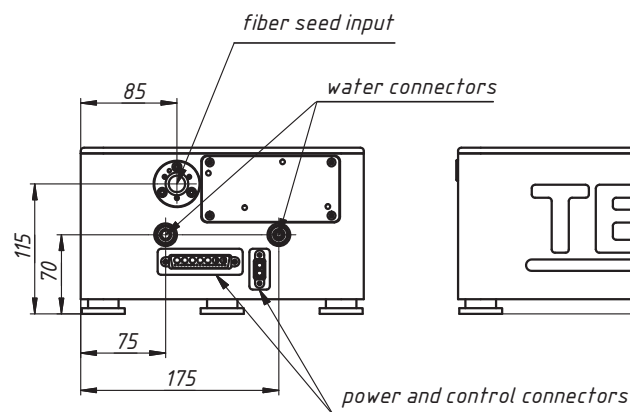


TETA-6 and TETA-10 laser head dimensions in mm
(please enquire for the TETA-20 dimensional drawing)

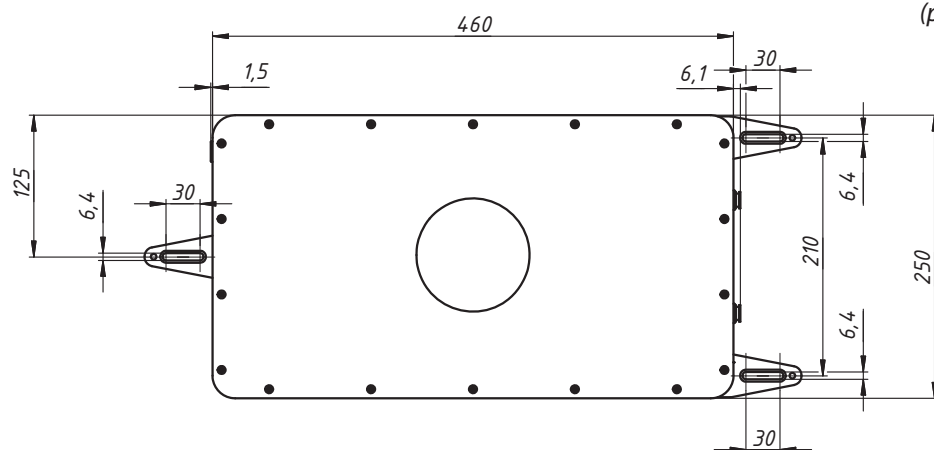

Material: Titanium alloy, thickness 2.5 mm.

Front surface:

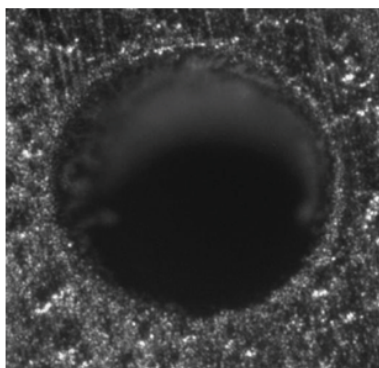

400-um hole drilling in 2.5 mm thick Ti alloy
by TETA system

1) Hole diameter 200 um




Figure 3. Frontal plate surface.




Figure 2. Rear plate surface

2) Hole diameter 300 um




Figure 6. Frontal plate surface.




Figure 7. Rear plate surface.

3) Hole diameter 400 um




Figure 8. Frontal plate surface.




Figure 9. Rear plate surface.

Side view (machining progress left to right)




Figure 3. Side view 30%.




Figure 4. Side view 70%.




Figure 5. Side view 100%.

Sapphire hole drilling in 440 um thick
sapphire wafer by the TETA system



AVESTA

LASERS AND OPTICAL SYSTEMS

fs@avesta.ru
www.avesta.ru

Avesta Ltd., 11 Fizicheskaya Street
Troitsk, 108840, Moscow, Russia
Tel.: +7 (495) 967-94-73
Fax: +7 (495) 646-04-95

China: Eachwave scientific instrument Co., Ltd
Tel: +86-21-62209657, +86-21-54843093
Email: sales@eachwave.com
Web: www.eachwave.com